


## Thermocouple & Fine Wire Welder Model L60+

### Standard Accessories

- Wire Holding Pliers & Lead
- Safety Glasses
- Magnifying Eyeglass
- Carbon Electrodes
- Spare 2A Fuse
- Argon Hose
- Mains Lead
- Footswitch for greater ease of use

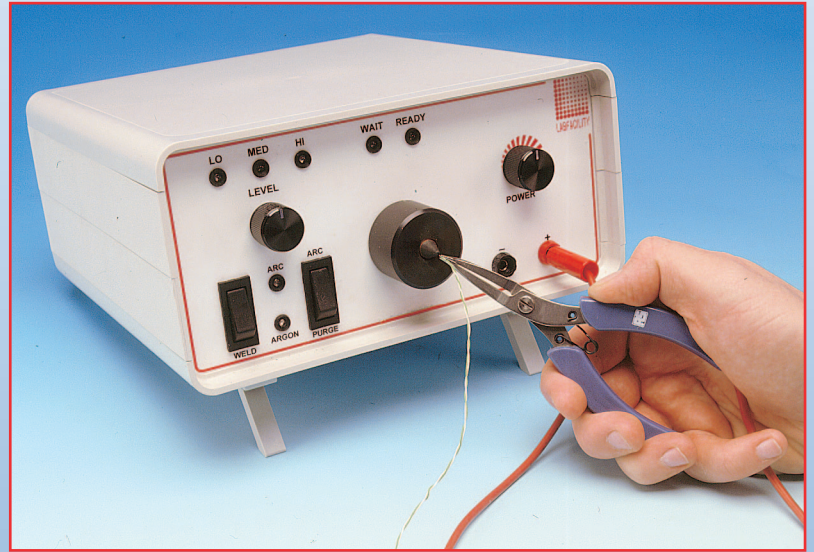

### Optional Accessories

- Spare Carbon Electrodes

The L60+ is designed for sensor manufacturers for the production of commercial grade thermocouple junctions, and for users of large numbers of exposed junction thermocouples such as test and development laboratories where multipoint temperature sensing of test pieces is required.

No special skills are needed and most people will be capable of producing quality work with minimal practice. The instrument can be operated via the front panel or by using the footswitch provided.

In addition to thermocouple work, the L60+ welder is used in many other applications involving the joining of wires to each other and to metal surfaces.

This model is suitable for welding wires up to 1.1 mm diameter and has an argon gas shield facility.

A satisfactory thermocouple junction is produced without using argon, but where argon is available a momentary purge is automatically triggered immediately prior to the weld to give optimum weld integrity.

# Thermocouple & Fine Wire Welder Model L60+

## Specifications

### GENERAL

Energy Output	0-60 Joules
Welding Capacity	Wires up to 1.1mm diameter
Duty Cycle	Minimum 5-10 welds/min

### MECHANICAL

Physical Dimensions	220mm Wide x 120mm High x 250mm Depth
Weight	4kg

### ELECTRICAL

Power Supply	110-120 Vac or 220-250 Vac, 50-60Hz
Power Consumption	Max 170VA dropping to 20VA during charging

### ORDERING GUIDE

Typical Part No. L60+ -220-250Vac

Model No.	Power Supply
L60+	110-120 Vac 220-250 Vac

Specifications and availability may be subject to change

### A range of Fine Thermocouple Wires is available from Labfacility:

- Ideal for use with L60+ welder
- Thermoelement types J, K, T & N
- PTFE & glass fibre insulated and bare wire
- IEC colour coded
- Available from stock

### and convenient Thermo Attachment Pads:

- Attach small diameter thermocouples to surfaces
- Range -50°C to +250°C
- Supplied in books of 100
- Available from stock



**LABFACILITY**  
TEMPERATURE & PROCESS TECHNOLOGY

To receive our regular email newsletter, please register your details on our website

[www.labfacility.co.uk](http://www.labfacility.co.uk)



Certificate No. 4746

**SOUTHERN UK & EXPORT DIVISION:** Units 5,6 & 7, Block K, Southern Cross Industrial Estate, Shripney Road, Bognor Regis, West Sussex PO22 9SD **Export Sales:** tel: +44(0)1243 871287 fax: +44(0)1243 871281 email: [exportsales@labfacility.co.uk](mailto:exportsales@labfacility.co.uk)

**Southern UK Sales:** tel: +44(0)1243 871280 fax: +44(0)1243 871281 email: [southernsales@labfacility.co.uk](mailto:southernsales@labfacility.co.uk)

**NORTHERN UK DIVISION:** Eden Place, Unit 3b Outgang Lane, Dinnington, Sheffield S25 3QT

**Northern UK Sales:** tel: +44(0)1909 569446 fax: +44(0)1909 550632 email: [northernsales@labfacility.co.uk](mailto:northernsales@labfacility.co.uk)