

Marlin – Connectors – Mini Strippanel with Mounting Frame

CONNECTORS MINI STRIPANEL® WITH MOUNTING FRAME


Mini Strippanel with mounting frame is a pre-assembled unit, ready for quick installation. Strippanel modules are mounted to a metal frame (3/32" thick). Each circuit is numbered, color coded and lettered with type code. (Hi-Temp Panels are color coded red.)

Available in any combination of rows and circuits per row. Standard sizes shown to table below. Standard Strippanels are provided with jacks loose packed for plug-in installation after wire hook-up. Horizontal mounting shown.

Strippanels with vertical mounting, mixed calibration or plugs instead of jacks are available upon request.

To order:

1. Give Code No. → 1238 - 4 X 10 - 40 - K
 2. Specify no. of horizontal rows
 3. Specify no. of circuits per row
 4. Give total number of circuits
 5. Give ANSI Thermocouple Code
 6. For vertical rows use suffix "V"
- e.g. 1238 - 4 X 10 - 40 - K - V

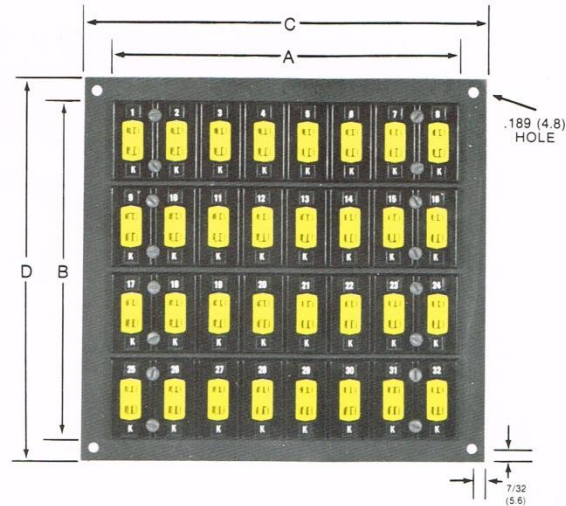

TOTAL CIRCUITS		NUMBER OF CIRCUITS PER ROW																D	B	PRICE 1238-	HI-TEMP PRICE 1338-					
		2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	FRAME HEIGHT	CUTOUT HEIGHT								
NUMBER OF ROWS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	2" (51mm)	1 3/8" (35mm)								
	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	3 5/16" (89mm)	2 11/16" (69mm)								
	3	6	9	12	15	18	21	24	27	30	33	36	39	42	45	48	4 5/8" (118mm)	4" (102mm)								
	4	8	12	16	20	24	28	32	36	40	44	48	52	56	60	64	5 15/16" (151mm)	5 5/16" (135mm)								
	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	7 1/4" (185mm)	6 5/8" (168mm)								
	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	8 9/16" (218mm)	7 15/16" (202mm)								
	7	14	21	28	35	42	49	56	63	70	77	84	91	98	105	112	9 7/8" (251mm)	9 1/4" (235mm)								
	8	16	24	32	40	48	56	64	72	80	88	96	104	112	120	128	11 3/8" (285mm)	10 9/16" (269mm)								
	9	18	27	36	45	54	63	72	81	90	99	108	117	126	135	144	12 1/2" (318mm)	11 7/8" (302mm)								
	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	13 13/16" (351mm)	13 3/16" (335mm)								
C FRAME WIDTH		2 1/8" (51mm)	2 1/4" (57mm)	2 3/8" (60mm)	2 1/2" (64mm)	2 7/8" (71mm)	3 1/8" (76mm)	3 1/2" (81mm)	3 3/4" (89mm)	4 1/8" (105mm)	4 1/2" (113mm)	4 3/4" (119mm)	5 1/8" (130mm)	5 1/2" (138mm)	5 3/4" (143mm)	6 1/8" (156mm)	6 3/4" (168mm)	7 1/4" (185mm)	7 3/4" (197mm)	8 1/2" (215mm)	9 1/8" (232mm)	9 3/4" (248mm)	10 1/2" (267mm)	11 3/8" (285mm)	11 7/8" (302mm)	
A CUTOUT WIDTH		1 3/8" (35mm)	2 1/8" (51mm)	2 1/4" (57mm)	2 3/8" (60mm)	2 1/2" (64mm)	2 7/8" (71mm)	3 1/8" (76mm)	3 1/2" (81mm)	3 3/4" (89mm)	4 1/8" (105mm)	4 1/2" (113mm)	4 3/4" (119mm)	5 1/8" (130mm)	5 1/2" (138mm)	5 3/4" (143mm)	6 1/8" (156mm)	6 3/4" (168mm)	7 1/4" (185mm)	7 3/4" (197mm)	8 1/2" (215mm)	9 1/8" (232mm)	9 3/4" (248mm)	10 1/2" (267mm)	11 3/8" (285mm)	11 7/8" (302mm)
Other arrangements available—Consult Factory																										

1. Hi-temp panels available.
e.g. 1338-4 x 10-40-K
(Hi-Temp Panels and connectors are color coded red.)
2. Availability: J,K,T,N,E,R,S,U; also "C" AT EXTRA COST.
3. Gold plated contacts are available at extra cost. Use suffix "G" (i.e. 1338-4x10-40-K-G)