KR2000 SERIES
GRAPHIC RECORDER

PERFORMANCE SPECIFICATION
CHINO

KR2000 Series are network-compatible paperless recorders with high performance and high operating function employed high visibility 5.6" TFT color LCD display. High speed of sampling rate 100ms and high accuracy of ±0.1% were realized, and measured data is stored into internal memory and maximum 8GB compact flash card (CF card). As it can be monitored by a web browser display on several computers on intranet or internet, FTP transfer of data file and E-mail notification are also available.

FEATURES

Employing clear 5.6"TFT color LCD display

· Large-sized high visibility display with various display functions. Real time/Historical trend screen, Bar-graph screen, Data screen are selectable for various applications.

Large capacity of data memory and various recording method

· Compact flash card (CF card) slot is equipped as standard external memory.
Large capacity storage of maximum 8GB is available.

· Various data storing methods are selectable such as schedule programming by time of day and time of date, recording start-up by external signal, and event and data logging of before and after trigger points for alarm.

Multi points recording with high speed/accuracy

· High-speed recording of approximately 100ms and high accuracy of ±0.1% were realized. Stable measuring and recording are possible with high speed.

· High withstand voltage of 1000V AC between input channels. (Except resistance thermometer input)

Easy operating and programming without manual

· Easy operating by dedicated keys for each function

USB port prepared in front compartment

· USB port is prepared for connecting maximum 8GB USB memory and PC.
Readout of data and files are possible by connecting the panel mounted recorder.

LAN network capability

· Various networked environment such as remote monitoring by browser, FTP server and E-mail notification are applied as Ethernet is equipped as standard.

Safety system and reliability

· No battery backup needed for external memory for recorded data storage.

Analyzing/data acquisition application software

· It is easy to replay and edit the recorded data file. Replay display has functions of vertical/horizontal trend, circular trend, and also wave-analyzing and marking by using the cursor.

MODELS

KR21□□□□□A

Measuring points/sampling rate*
- 60 : 6 points/100ms
- 20 : 12 points/100ms
- 61 : 6 points/1s
- 21 : 12 points/1s

USB port
- M : USB memory stick (type A)
- – : PC (type B)

Communications interface (option)
- N : None
- R : High-order (RS232C/RS485)
- Q : High-order (RS232C/RS485) + Low-order (RS485)

Digital input/ alarm output (option)
- 0 : None
- 1 : Mechanical relay output - 12 points (a contact)
- 2 : Mechanical relay output - 6 points (c contact)
- 7 : Digital input - 8 points + MOS relay output 8 points

* 1 to 4 channels input (4 points) when setting faster than 500ms sampling rate with model of 1sec sampling rate.

SCREENS

Real-time trend screen

Displays data (measured and virtual) of selected group.
Vertical trend and horizontal trend selectable.

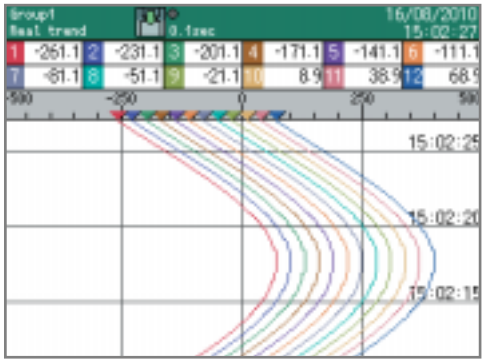

Bar-graph screen

Displays data (measured and virtual) of selected group.
Combination display with real-time trend is available.

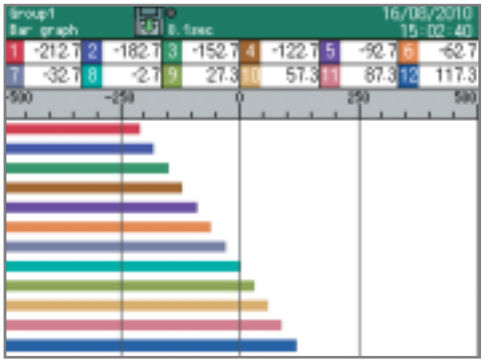

Data screen

Displays data (measured and virtual) of selected group.
Simultaneous display of alarm status.

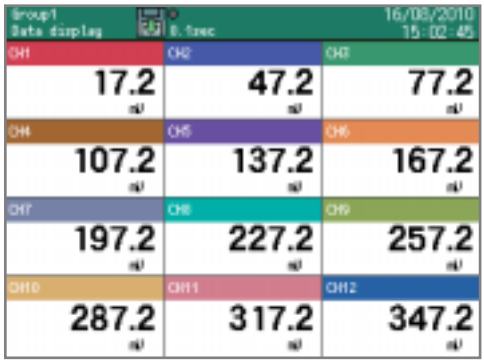

Dual trend screen

2 split display for real-time trend and historical trend.
Scroll available for historical trend.

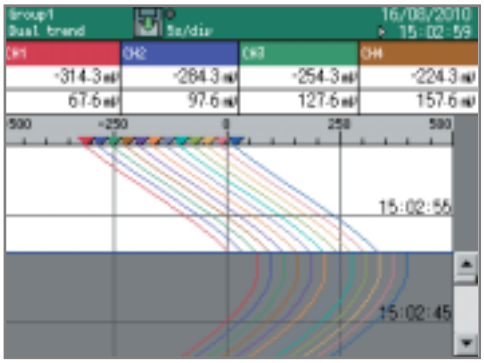

Information screen

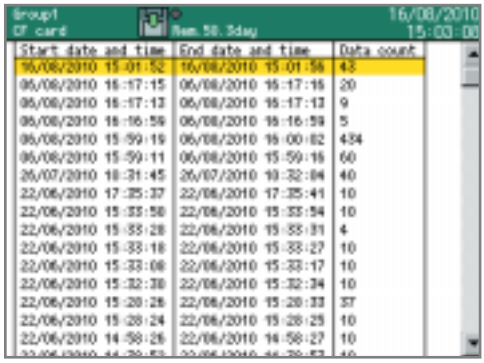

HOME setting screen

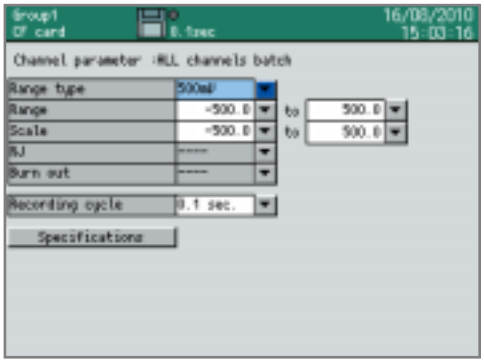

Channel setting screen

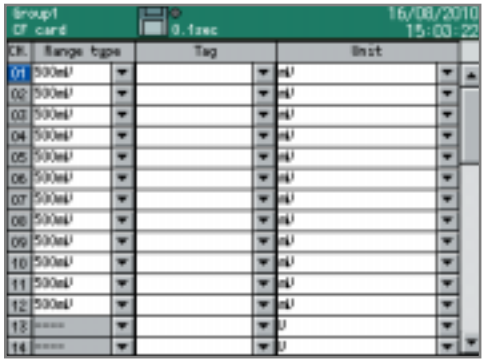

Schedule setting screen

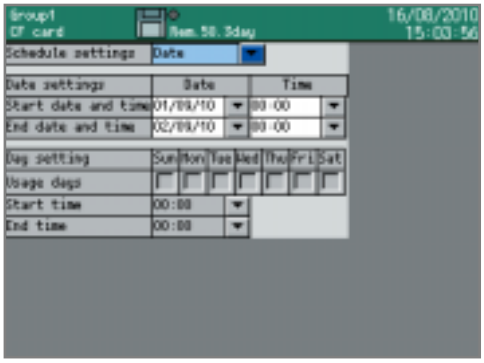

INPUT SPECIFICATIONS

Measuring points: 6 points, 12 points
Input types: Universal
DC voltage --- ±13.8mV, ±27.6mV, ±69.0mV
±200mV, ±500mV, ±2V
±5V*, ±10V*, ±20V*, ±50V*
(*with built-in voltage divider)
DC current --- With external shunt resistor (sold separately)
Thermocouple --- B, R, S, K, E, J, T, N, PtRh40-PtRh20, W-WRe26, WRe5-WRe26, PlatinelⅡ, NiMo-Ni,CR-AuFe, U, L
Resistance thermometer --- Pt100, JPt100, Pt-Co, Pt50
Accuracy ratings: Refer to the table of measuring range and accuracy ratings
Reference junction compensation accuracy:
K, E, J, T, N, PlatinelⅡ--- ±0.5°C or less
R, S, W-WRe26, WRe5-WRe26, NiMo-Ni, CR-AuFe,U, L --- ±1.0°C or less
Sampling rate: 100ms --- Approximately 100ms for all points
1s --- Approximately 300ms for all points*
*100ms/4 points when setting faster than 0.5s (0.1s to 0.5s) sampling rate with model of KR2161/KR2121
Burnout: Disconnection of input signal is detected on thermocouple and resistance thermometer input. UP/DOWN/DISABLE is selectable.
Scaling: Range/scale is selectable.
Digital filter: Programming FIR filter for each point (common to all points)
Allowable signal source resistance:
Thermocouple input (burnout disable)/
DC voltage input (±2V or less) ---1kΩ or less
DC voltage input (±5V or more) ---100Ω or less
Resistance thermometer --- Per wire 10Ω or less (same resistance for 3 wires)
Input resistance: DC voltage, thermocouple input --- Approximately 1 MΩ
Maximum input voltage:
DC voltage input (±2V or less)/ thermocouple input (burnout disable) --- ±10VDC
DC voltage input (±5V to ±50V) --- ±60VDC
Dielectric strength between channels:
1000V AC or more between each channel (High strength semiconductor relay used)
(B terminal of resistance thermometer is shorted inside between channels)

RECORDING SPECIFICATIONS

Memory for history: 132MB
Additional memory: CF card (Up to 8GB),
USB memory stick (Up to 8GB)
*Type A is only available for USB memory stick.
Not all USB memory stick is operated.
Recording cycle: 100, 200, 500ms
1, 2, 3, 5, 10, 15, 20, 30s
1, 2, 3, 5, 10, 15, 20, 30, 60min
Logging data: Measured data --- File name (group name), time of day, month and year of recording start, tag, measured data, alarm status/types
Setting parameter
Operation result data
Storing types: Binary/CSV
Storing methods: Manual start/stop (dedicated key operation)
Schedule (designation for time of day and date)
Trigger signal (alarm event, digital input)
*Pre-trigger is selectable
Measuring numbers of pre-trigger --- Maximum 950 data
Recording group: Recording cycle 500ms or faster --- up to 3 groups of 12 points/group can be programmed
Recording cycle 1s or slower --- up to 5 groups of 44 points/group can be programmed
(Up to total of 100 points)

When 6 channels recorded in sampling mode (real data)

Recording cycle	128MB	256MB	512MB	1GB	2GB
0.1 sec	6.32 days	12.6 days	25.3 days	50.6 days	101 days
1sec	63.2 days	126 days	253 days	1.4 yrs	2.8 yrs
60 sec	10 yrs	21 yrs	42 yrs	83 yrs	166 yrs

When 12 channels recorded in sampling mode (real data).

Recording cycle	128MB	256MB	512MB	1GB	2GB
0.1 sec	3.16 days	6.32 days	12.6 days	25.3 days	50.6 days
1sec	31.6 days	63.2 days	126 days	253 days	1.4 yrs
60 sec	5.2 yrs	10 yrs	21 yrs	42 yrs	83 yrs

COMPUTATION SPECIFICATIONS

Computation points: Maximum 44 points
Computation types:
Arithmetic operations --- Addition, subtraction, multiplication, division, remainder, exponential
Comparison operations --- Equality, inequality, great, less, equality /great, equality / less
Logical operations --- AND, OR, XOR, NOT
General functions --- Round-up, round-down, absolute value, square root, exponent of e, natural logarithm, common logarithm
Integration operations --- Analog integration, digital integration
Channel data operations --- Measured data computation, calculated data computation
Others --- Dew point, relative humidity, F-value Remaining amount of CF card

ALARM SPECIFICATIONS

Setups: Up to 4 alarms can be programmed per channel
Alarm types: Upper limit, lower limit, differential upper limit, differential lower limit (deadband is selectable), abnormal data
Delay function: Setup range of alarm delay --- 1 to 3600 seconds
Alarm settings: AND/OR selectable
Alarm outputs: Refer to option specification

DISPLAY SPECIFICATIONS

Display: 5.6"TFT color LCD
Display types: Measured data display (Trend screen, Data screen, Bar-graph screen)
Historical trend display (simultaneous display with Real-time trend is available)
Information display (alarm display, marker list, file list)
Setting screen (alarm, computation, memory, system, maintenance, communication, etc.)
Trend screen: 12 colors selectable
Display screen--- 5 screens (5 groups)
Display points --- Maximum 44 points/screen
Time axis direction --- Vertical or horizontal
Line width --- 1/3/5 dot selectable
Scale display --- 4 scales
Tag/data display --- Show/hide selectable
Marker display
Data screen: Display screen --- 5 screens (5 groups)
Display points --- Maximum 44 points/screen
Display contents --- Measured value, channel/tag, unit, alarm status
Bargraph screen: 12 colors selectable
Display screen --- 5 screens (5 groups)
Display points --- Maximum 44 points/screen
Display direction --- Vertical or horizontal
Scale display --- 1 scale
Information display: Alarm display (alarm activation/released history display)
Marker list
File list (group data file list display)
LCD back light: Auto/manual OFF function
Unit information (Model, Serial no., option, etc.)
Brightness --- 4 levels adjustment

*The LCD display may contain some pixels that always or never illuminate, and the brightness of some areas of the display may appear uneven. There are typical LCD performance characteristics and do not constitute malfunctions.

COMMUNICATION FUNCTIONS

Network

Communication type:
Ethernet (10BASE-T/100BASE-TX)
FTP server: Data file can be read from the network computer
FTP client: Transfer a data file to a network server
SNTP client: The time can be synchronized to the time of SNTP server
Web server: Conformed to HTTP1.0 --- Displays the alarm, information of maintenance by browser software (InternetExplorer5.0 or later, NetScape6.0 or later, Opera7 or later)
* User's ID and password registration available
E-Mail: E-Mail notification at specified time for alarm activation
Report data at specified time is selectable from all registered data
Notification address --- Maximum 8 contacts

USB Communications

USB: Communication type --- USB1.1
Transfer systems --- Bulk transfer, control transfer
File transfer by connecting as removable disk drive

TYPE A

TYPE B

CONNECTIVITY

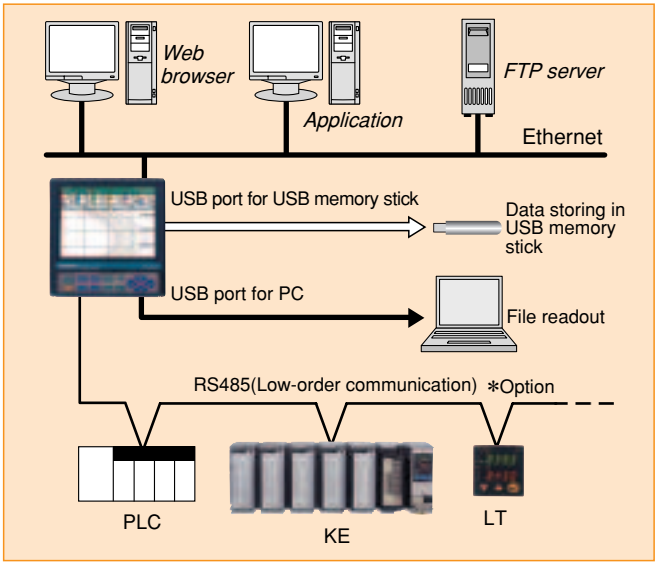

PROGRAMMING/OPERATION SPECIFICATIONS

Operation key: HOME, MENU, DISP, MARKER, SCROLL, CURSOR, START, STOP, DIRECTION keys, ENTER, ESC

HOME settings: Simple recording settings --- Common setting to all channels
Parameter programming for all channels together, recording cycle, selection settings

MENU settings: Input/computation programming --- Input parameter, computation parameter
DISP settings --- Data channel parameter, group parameter, common parameter (combination display, trend vertical/horizontal)
Alarm settings
File settings (5 individual files) --- Storing method settings
Marker text settings
System settings --- Communication, clock, maintenance, key lock, password, screen, etc.

DISP operations: Operating screen selection --- Trend, data, bar-graph, historical trend, alarm display, maker list
Display selection on each screen --- Group 1 to 5 selectable

GENERAL SPECIFICATIONS

Rated power voltage: 100 to 240V AC (universal power supply) 50/60Hz

Maximum power consumption:
50VA

Reference operating condition:
Ambient temperature --- 21 to 25℃,
Ambient humidity --- 45 to 65%RH
Power voltage --- 100V AC±1.0%
Power frequency --- 50/60Hz±0.5%
Attitude --- Left/right 0˚, forward/backward 0˚
Warm-up time --- Longer than 30 minutes

Normal operating condition:
Ambient temperature --- 0 to 50℃
Ambient humidity --- 20 to 80%RH
Power voltage --- 90 to 264V AC
Power frequency --- 50/60Hz±2%
Attitude --- left/right 0˚, forward tilting 0˚,
Backward tilting 0˚ to 20˚

Transport condition (at the packed condition on shipment from our factory):
Ambient temperature --- -20 to 60℃
Ambient humidity --- 5 to 90%RH (No dew condensation)
Vibration --- 10 to 60Hz 0.5G (4.9m/S^2) or less
Impact --- 40G (392m/ S2) or less

Storage condition: Ambient temperature --- -20 to 60℃
Ambient humidity --- 5 to 90%RH (No dew condensation)

Power failure protection:
Setups and data are backed up by flash memory
Clock --- Lithium battery backs up RAM
(Minimum 5 years)

Insulation resistance: Secondary terminals and protective conductor terminals --- 20MΩ or more at 500V DC
Primary terminals and protective conductor terminals --- 20MΩ or more at 500V DC
Primary and secondary terminals --- 20MΩ or more at 500V DC
Primary terminals: power terminals (L,N), alarm output terminals
Secondary terminals: measuring input terminals, digital input terminals, communications terminals

Dielectric strength: Secondary terminals and protective conductor terminals --- 1 minute at 500V AC
Primary terminals and protective conductor terminals --- 1 minute at 1500V AC
Primary and secondary terminals --- 1 minute at 2300V AC
Primary terminals: power terminals (L,N), alarm output terminals
Secondary terminals: measuring input terminals, digital input terminals, communications terminals

Case assembly material:
Front bezel --- ABS resin
Case --- Steel

Color: Front bezel --- Black (equivalent to Mussel N3.0)
Case --- Painting color, gray (equivalent to Mussel N7.0)

Weight: 2.2kg

Mounting: Panel mounting

Terminal screws: Power terminals/protective conductor terminals/communications terminals --- M4.0
Measuring input terminals/alarm output terminals/digital input terminals --- M3.5

STANDARDS

CE : EMC directive --- EN61326: 1997 + A1 + A2 + A3: 2003
Class A
EN61000-3-2: 2000
EN61000-3-3: 1995 + A1: 2001
Low voltage directive --- EN61010-1: 2nd ed. (2001)

Protection: Conformed to IEC529 IP65 (recorder front bezel)

OPTION SPECIFICATIONS

Options	Specifications	
Mechanical relay alarm output	Mechanical relay contact output for abnormal input and alarm activation Output: 12 points (a contact), 6 points (c contact) Contact ratings: Mechanical relay --- 100V AC 0.5A, 240V AC 0.2A, 30V DC 0.3A	
MOS relay alarm output	MOS relay contact output for abnormal input and alarm activation Output: 8 points Contact ratings: MOS relay --- 240V (DC, AC) 50mA	
Communications interface	High-order communications	Communications interface for high-order units RS232C/RS485 (MODBUS) switchable Ethernet is standard equipped
	Low-order communications	Communications interface for low-order units Input data storing of units connected to low-order RS485 (MODBUS) Recording points: 6 points recorder --- 30 points 12 points recorder --- 24 points Sampling rate: 1s per connected unit Models: KE, SE3000, KR2000, KR3000, LE5000, AL3000/AH3000 LT230, 830, 350, 450, 470, DB1000, 2000, KP1000/KP2000/DP-G, JU, JW (only data acquisition)
Digital inputs	ON/OFF signal	ON/OFF input recording
	Pulse input	Maximum 10Hz pulse input Used for flow, operating time and frequency Input system: Photocoupler isolation (Common use for contact and pulse input) Built-in isolated power supply (approx. 5V) Input type: Non-power contact, open collector (TTL or transistor)
	Remote contact	The following operations are available by contact input 8 points and common signal 4 points (Selectable by parameter). ・Data memory triggering Start data recording by conductive signal from OFF to ON Data recording while conductive signal is ON ・Marker display Registered makers display by conductive signal from OFF to ON ・Integration operations Reset data for integration operations (all channels simultaneously)
Others	Handle and feet, white front bezel, point indication card	

OPERATION KEYS

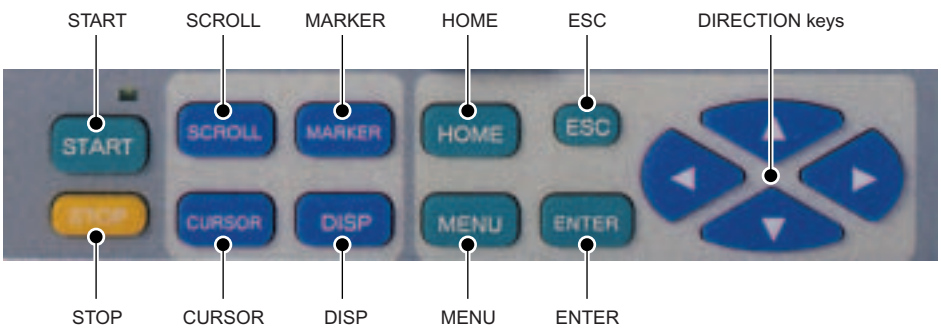

MEASURING RANGES

Input type		Messureing range	Accuracy ratings
DC voltage		-13.80 to 13.80mV -27.60 to 27.60mV -69.00 to 69.00mV -200.0 to 200.0mV -500.0 to 500.0mV -2.000 to 2.000V	±0.1%±1digit
(with built-in voltage divider)		-5.000 to 5.000V -10.00 to 10.00V -20.00 to 20.00V -50.00 to 50.00V	
T/C	K	-200.0 to 300.0℃ -200.0 to 600.0℃ -200 to 1370℃	±0.1%±1digit *-200 to 0℃: ±0.2%±1digit
	E	-200.0 to 200.0℃ -200.0 to 350.0℃ -200 to 900℃	
	J	-200.0 to 250.0℃ -200.0 to 500.0℃ -200 to 1200℃	
	T	-200.0 to 250.0℃ -200.0 to 400.0℃	
	R	0 to 1200℃ 0 to 1760℃	±0.1%±1digit *0 to 400℃: ±0.2%±1digit
	S	0 to 1300℃ 0 to 1760℃	
	B	0 to 1820℃	±0.1%±1digit *0 to 400℃:Out of accuracy ratings *400 to 800℃: 0.15%±1digit
	N	-200.0 to 400.0℃ -200.0 to 750.0℃ -200 to 1300℃	±0.15%±1digit *-200 to 0℃: ±0.3%±1digit
	W-WRe26	0 to 2315℃	±0.15%±1digit *0 to 100℃: ±4%±1digit *100 to 400℃: ±0.5%±1digit
	WRe5-WRe26	0 to 2315℃	±0.2%±1digit
	PtRh40-PtRh20	0 to 1888℃	±0.2%±1digit *0 to 300℃: ±1.5%±1digit *300 to 800℃: ±0.8%±1digit
	NiMo-Ni	-50.0 to 290.0℃ -50.0 to 600.0℃ -50 to 1310℃	±0.2%±1digit
	CR-AuFe	0.0 to 280.0K	±0.2%±1digit *0 to 20K: ±0.5%±1digit *20 to 50K: ±0.3%±1digit
	PlatinelⅡ	0.0 to 350.0℃ 0.0 to 650.0℃ 0 to 1395℃	±0.15%±1digit
	U	-200.0 to 250.0℃ -200.0 to 500.0℃ -200.0 to 600.0℃	±0.15%±1digit *-200 to 0℃: ±0.3%±1digit
	L	-200.0 to 250.0℃ -200.0 to 500.0℃ -200 to 900℃	±0.1%±1digit *—200 to 0℃: ±0.2%±1digit
RTD	Pt100	-140.0 to 150.0℃ -200.0 to 300.0℃ -200.0 to 850.0℃	±0.1%±1digit *-140.0 to 150.0℃ 700 to 850℃: ±0.15%±1digit
	JPt100	-140.0 to 150.0℃ -200.0 to 300.0℃ -200.0 to 649.0℃	±0.1%±1digit *-140.0 to 150.0℃: ±0.15%±1digit
	Pt50	-200.0 to 649.0℃	±0.1%±1digit
	Pt-Co	4.0 to 374.0K	±0.15%±1digit *4 to 50K: ±0.3%±1digit

Note: The accuracy ratings are converted into the measuring range under reference operating condition. Thermocouple input does not contain reference junction compensation accuracy.
K,E,J,T,R,S,B,N:IEC584,JIS C1602-1995
W-WRe26,WRe5-WRe26,PtRh40-PtRh20,PlatinelⅡ,NiMo-Ni,
Cr-AuFe:ASTM Vol14.03
U(Cu-CuNi),L(Fe-CuNi):DIN43710
Pt100:IEC751(1995),JIS C1604-1997
JPt100:JIS C1606-1989

APPLICATION SOFTWARE ZAILA (sold separately)

The software is applied for replay display/wave editing operation of recorded data in KR2000 series. It has replay display of vertical/horizontal trend and circular trend function, and also analyzing function such as magnify/reduce/partially magnify of graphs and message insert.

Display examples

Trend display window (vertical flow)



Trend display window (horizontal flow)



Trend display window (circular trend)



Bar-graph



Main functions

Trend display
Selectable from trend display window (vertical flow, horizontal flow) and circular trend display window.

Continuous replay display window
Trend is scrolled continuously (automatically).
Scroll changes by speed and renewal data no.

Data list display window
Displays registered data as list display.

Bar-graph
Displays by bar. Message can be inserted into bar-graph.

Data between markers
Displays date/time, time difference between 2 data, data difference, maximum, minimum, average, standard deviation and median among all data.

Alarm display
Points for alarm activation at each level are displayed on a trend graph.

Settings
Cursor, trend line, scale axis, time axis, title input on the graph, graph assistant and magnify/reduce/rotation of graphs

Data conversion
Exporting to Excel, and converting to CSV file or TEXT file are available.

ENVIRONMENT

CPU	1GHz or faster
OS	Windows 98/Me Windows 2000/XP Home/XP Pro *Internet Explorer 4.0 or later
Memory	256MB or more (512MB or more recommended)
Disk drive	CD-ROM drive: 1 drive or more Hard disk drive: Disk space of 1 drive or more for 100MB or more
Language	Japanese, English, Chinese (simplified and traditional characters), Korean

TERMINAL ARRANGEMENT

Alarm mechanical relay alarm output 12 points (option)

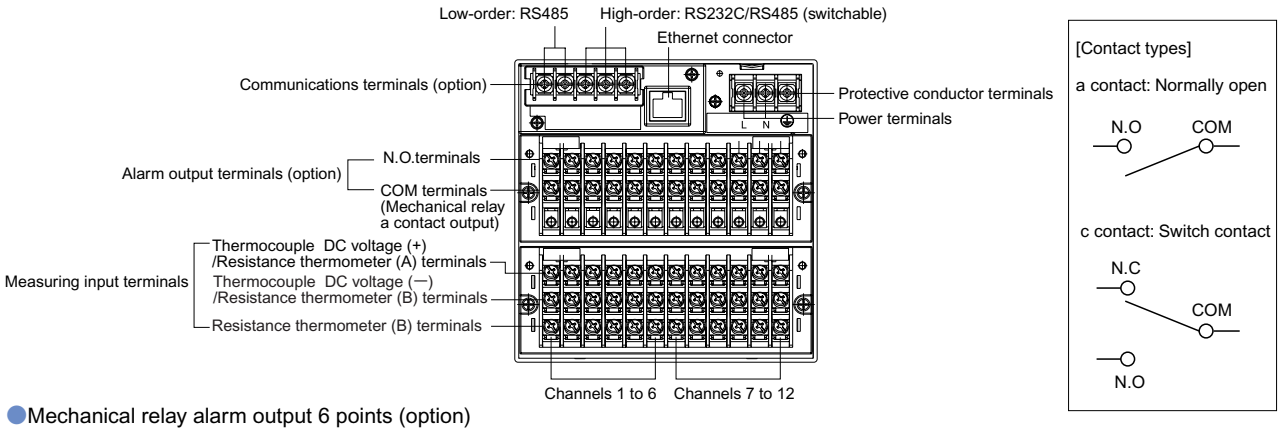

Mechanical relay alarm output 6 points (option)

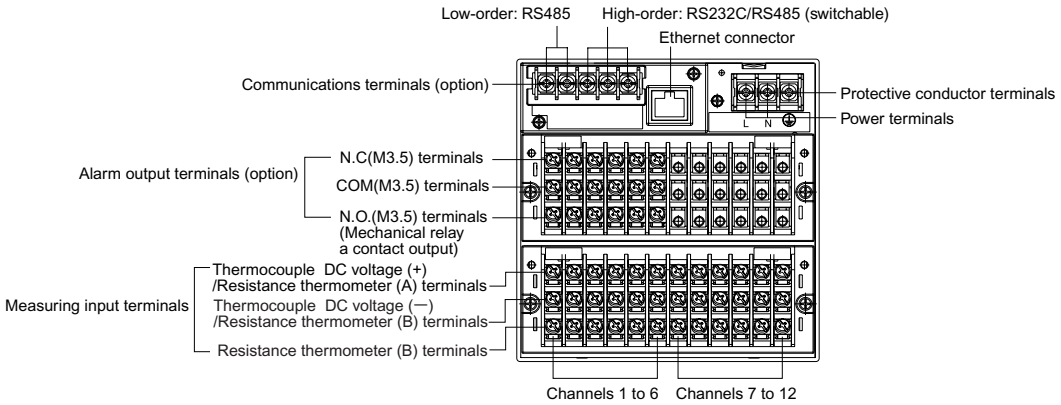

Digital input 8 points + MOS relay alarm output 8points (option)

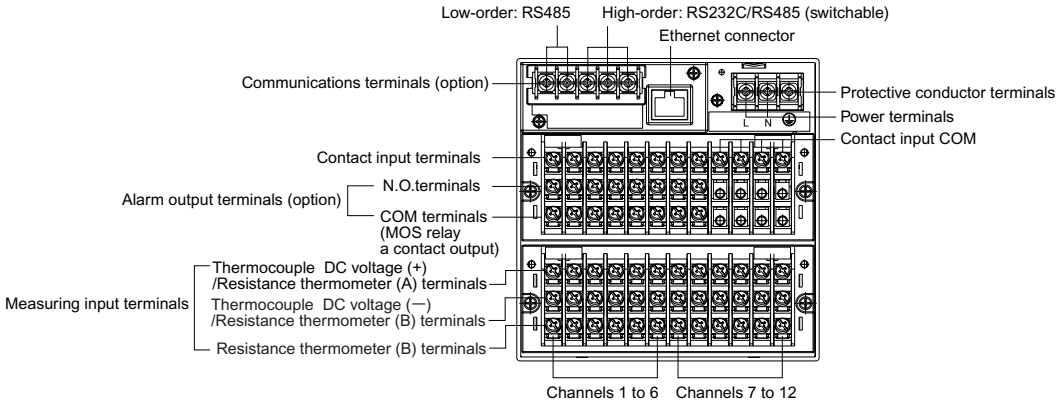

DIMENSIONS

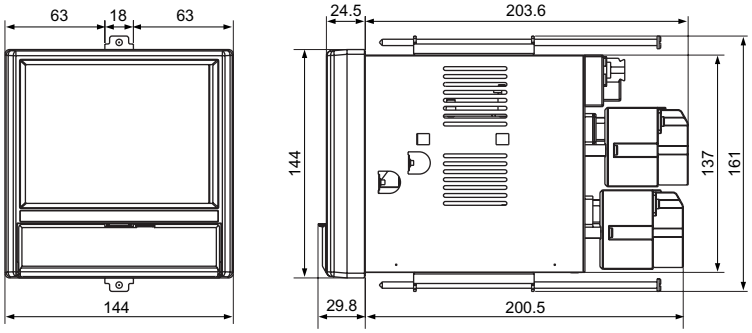

PANEL CUTOUT



Unit: mm

Specifications subject to change without notice. Printed in Japan (I) 2010. 10

CHINO CORPORATION
32-8 KUMANO-CHO,ITABASHI-KU,TOKYO 173-8632
Telephone : +81-3-3956-2171
Facsimile : +81-3-3956-0915
E-mail : inter@chino.co.jp
Website : www.chino.co.jp/