




Marlin - Connectors - Full Size - 2-Pole

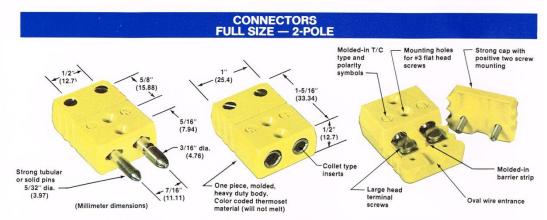

FULL SIZE 2-POLE			
CODE NO.	PRICE EACH	DESCRIPTION	
1060 - *		Plug	
1050 - † 1010 - *		Solid Pin Plug Jack	

- · 2-Pole Connector plugs and jacks are made to exacting specifications to provide rapid, dependable connections between thermocouples and extension wires.
- · Alloys of prongs and inserts match ANSI calibrations to maintain sensing accuracy. Alloy and polarity are identified by symbols molded into body.
- · Connector bodies molded of glass-filled thermoset com-Connector bodies molded of glass-filled thermoset compounds (will not melt) for high strength and dependability. The color coded Connectors will withstand ambient temperatures to 400° F (205° C) continuous and 500° F (260° C) intermittent. High-Temperature Connectors (All Hi-Temperatures to 800° F (425° C) continuous and 1000° F (540° C) intermittent.
- Inserts are spring loaded collet type to assure positive full contact with the negative insert larger making it virtually impossible to mismate.
- For corrosive applications, gold or nickel plated prongs and inserts are available. Caution system errors can result from use of plated contacts if significant thermal gradients exist at connector.

For gold plating use suffix "G" (i.e. 1060-K-G) at extra cost. For nickel plating use suffix "P" (i.e. 1060-K-P) at extra cost.



FULL SIZE HIGH-TEMPERATURE 2-POLE			
CODE NO.	PRICE EA.	DESCRIPTION	COLOR CODE
1160 - *		Hi-Temp Plug	250
1150 - † 1110 - *		Solid Pin Plug Hi-Temp Jack	RED

^{* -} Tubular Pin Availability: J,K,T,N,E,R,S,U, also "C" EXCEPT at extra cost. † - Solid Pin Availability: J,K,T,E,R,S,U.

MOUNTING HARDWARE FOR 2-POLE CONNECTOR

Nickel Plated Construction.

· All screws mount from top into threaded bottom plate. (no loose nuts). Remove body nuts by loosening "cap" screw and pushing. Use new "plate" screws for assembly.

CA	BLE CLAN	IP .	
CODE NO.	PRICE EA.		
1080		MARKET IN	1
1088 /mtg. stud			For cable to 3/8" dia.
WI	RE CLAM	P	
CODE NO.	PRICE EA.		8
1084			1 6
1085 /mtg. stud			Strain relief for insulated wire
CRIM	MP ADAPT	ER	insulated wire
CODE NO.	PRICE EA.		
074-125 074-187			
COMPRE metal sheat	SSION AD	APTER connector)	
CODE NO.	PRICE EA.		
1070-*			The state of the s
1078-*			1

(metal sheat	hed T/C to	
NO.	PRICE EA.	
1070-*		
1078-* w/mtg. stud		

COMPRESS (metal sheath	SION ADA	PTER-DUAL to connector)
CODE NO.	PRICE EA.	
1071-*		

Specify Size: Blank, .040", .062", .125", .187", .250", .312", .375
*Code: 000, 040, 062, 125, 187, 250, 312, 375 *Code: No nut or ferrule.